


HELIOS 200 - LX300

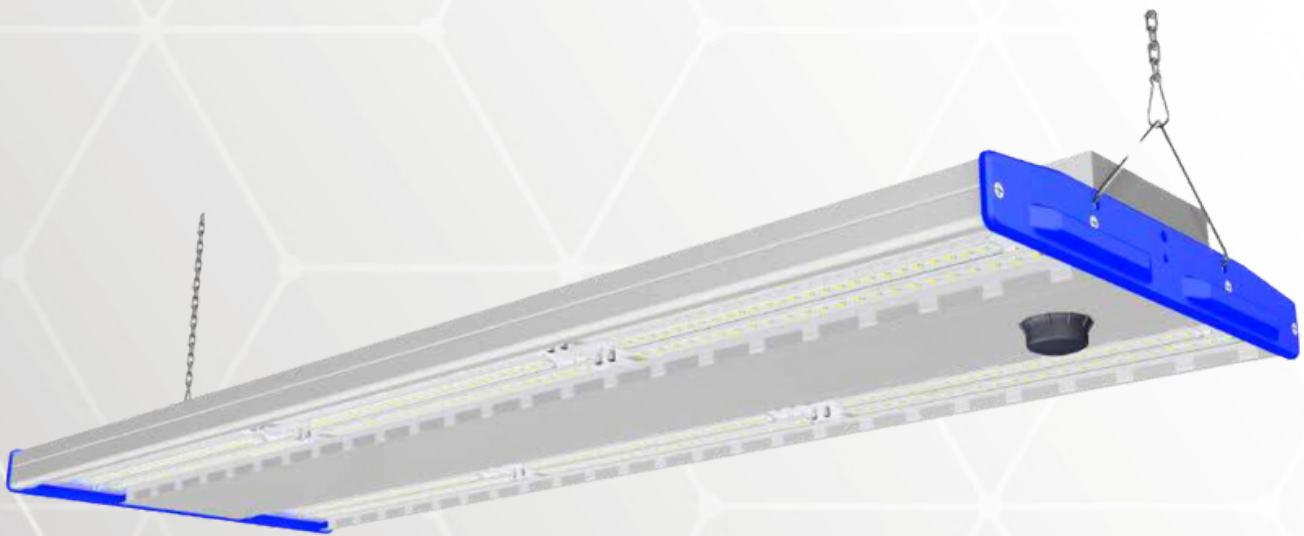


Introducing our new 200lm/w HELIOS linear High Bay fixture from PTLX Global. With wattage options from 100 - 500W the HELIOS line offers many application opportunities across Industrial facilities, Large Maintenance Bays, Logistic Centers, and Warehouses. Opt for intelligent controls and the variability and flexibility of the HELIOS line offers both outstanding illumination while controlling energy costs and consumption.


HELIOS LX 300

Part Number	Helios LX 300
Input Power	300W
Lumen Output	60000lm
LED Chip	Lumileds 2835
Luminous Efficacy	200LM/W
LED Quantity	1152pcs
CCT	3000K-6500K
Input Voltage	AC100-277V/347V/480V, 50/60Hz
PFC	>0.92
CRI	≥80
Beam Angle	60°/90°/120° (milky white PC lens or clear PC lens optional)
IP Rating	IP54
Working Temperature	-30°C to +55°C
Warranty	7 years
Lifespan	>100,000hrs
Material	Aluminum housing+PC lens
Certification	UL, DLC Premium
Dimensions	36" L x 11.8" W x 1.6" H 908mm L x 299mm W x 40.5mm H
N.G(KG)	7.8kg
G.W (KG)	17kg
Package Size	40" L x 15" W x 10.6" H 1010mm L x 380mm W x 270mm H
Pcs/carton	2pcs

PRODUCT DIMENSIONS

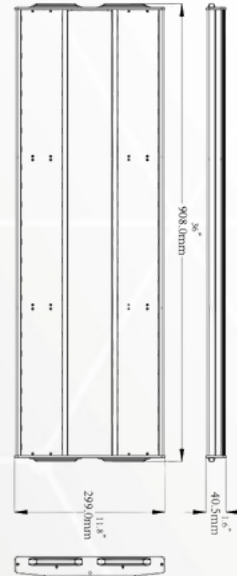

PHOTOMETRICS

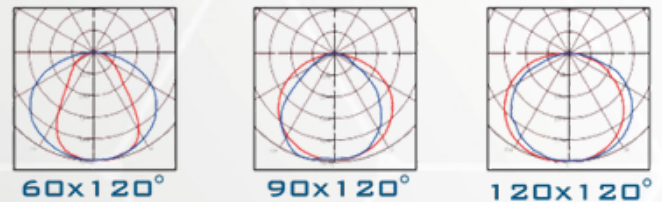

CERTIFICATIONS

