

HELIOS 200/250




Introducing our new 200lm/w HELIOS linear High Bay fixture from PTLX Global. With wattage options from 100 - 500W the HELIOS line offers many application opportunities across Industrial facilities, Large Maintenance Bays, Logistic Centers, and Warehouses. Opt for intelligent controls and the variability and flexibility of the HELIOS line offers both outstanding illumination while controlling energy costs and consumption.

HELIOS LX 200/250

Part Number	Helios LX 200
Input Power	100 - 500W options
Lumen Output	ex. 300W ~ 60,000 lumen
LED Chip	Lumileds 2835
Luminous Efficacy	200LM/W
LED Quantity	768pcs
CCT	3000K-6500K
Input Voltage	AC100-277V/347V/480V, 50/60Hz
PFC	>0.92
CRI	≥80
Beam Angle	60°/90°/120° (milky white PC lens or clear PC lens optional)
IP Rating	IP54
Working Temperature	-30°C to +55°C
Warranty	7 years
Lifespan	>100,000hrs
Material	Aluminum housing+PC lens
Certification	UL, DLC Premium
Dimensions	24" L x 11.8" W x 1.6" H 613mm L x 299mm W x 40.5mm H
N.G(KG)	5.2kg/5.4kg
G.W (KG)	11.4kg/11.4kg
Package Size	27.6" L x 15" W x 10.2" H 700mm L x 380mm W x 260mm H
Pcs/carton	2pcs

PRODUCT DIMENSIONS

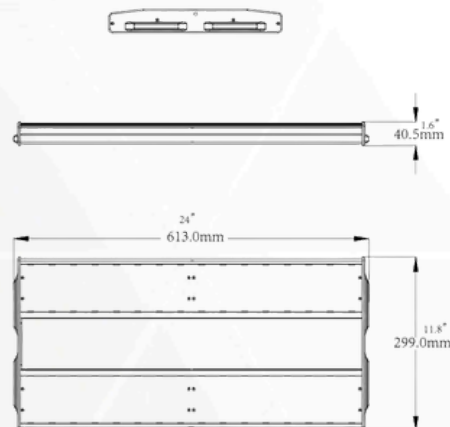

PHOTOMETRICS



Ex. Helios LX 200 - 250W



CERTIFICATIONS

